



**DVR3 Electronic Dynamo Regulator & Cut-out:
Field to Earth ('Shunt Field'), with current limiting**

Available only from Electrodynamic Solutions Ltd (see p4)


Introduction

Some of the key benefits from fitting a DVR3 high quality 'solid state' electronic dynamo regulator to the classic vehicle user are (in no particular order):

- ◆ brighter & more consistent lighting ('steady ammeter reading')
- ◆ reliable charging from lower engine speed
- ◆ easier starting due to greater battery power
- ◆ longer battery and bulb life
- ◆ lower maintenance (no adjustments to make & less battery top up)

General Description

The DVR3 is an electronic dynamo regulator offering a wide choice of output current values (5 to 40 Amps). It is suited for use on many classic cars and other vehicles fitted with 2 brush dynamos with one side of the field winding connected to common 'earth' (sometimes referred to as 'shunt' field connection). It replaces both 2 bobbin CVC units and the later 3 bobbin Current-Voltage types. DRL has made every effort to ensure a robust and reliable design, using latest electronic components assembled using 'surface mount' technology. It is electrically rugged and will survive many accidental wiring faults. The DVR3 is housed in a compact aluminium alloy case for superior heat transfer. This keeps the circuitry cool for enhanced reliability.

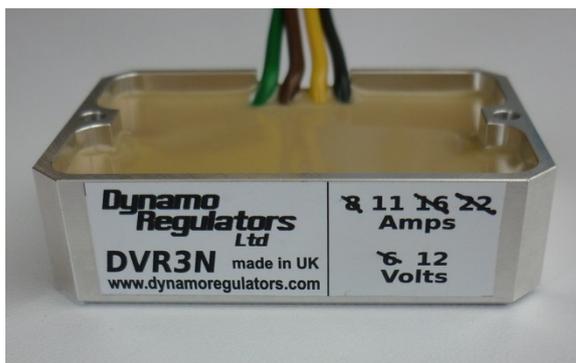

Protection features

The current limit circuitry offers protection from excessive drain due to faulty wiring or a low or failing battery for example. The unit is protected against voltage spikes from the dynamo or on the battery line and reversed polarity output of the dynamo. Experience has shown that these features are essential. Fitting at least one fuse is good practice with either original equipment type regulators or an electronic replacement to protect the vehicle from fire or other expensive damage to wiring and equipment. A 25A maximum fuse is recommended for 16 and 22 Amp versions, or a 15A maximum fuse for the 8 and 11 Amp versions. Use 30 A or 40 A fuse for higher current limit values.

Fitting

The DVR3 unit size is 60 x 42 x 18 mm. These units generate only a modest degree of heat but proper mounting is necessary to limit temperature rise and extend regulator life. Preferably the regulator is attached firmly to a flat (not hot) metal surface to act as a heat-sink with the supplied adhesive thermal bonding pad. Peel away the protective layer to expose the sticky surface. Position and press firmly. Central holes either end of the case, 54 mm centres, (M3 clearance) provide an alternative or additional fixing method.

Connections

Before fitting the regulator we recommend confirming that your dynamo gives a good output of the correct polarity.

Seek the assistance of an auto-electrician or other competent person if unsure about any aspect of fitting.

Disconnect the battery or remove fuse to isolate before connecting!

Connect the four leads as follows:

Brown to **Ammeter** (via fuse)

Green to **Field**


Yellow to **Dynamo**

Black (Negative earth) OR

Red (Positive earth) to **Earth/chassis**

Don't forget to refit the fuse!

Typical Wiring Connections

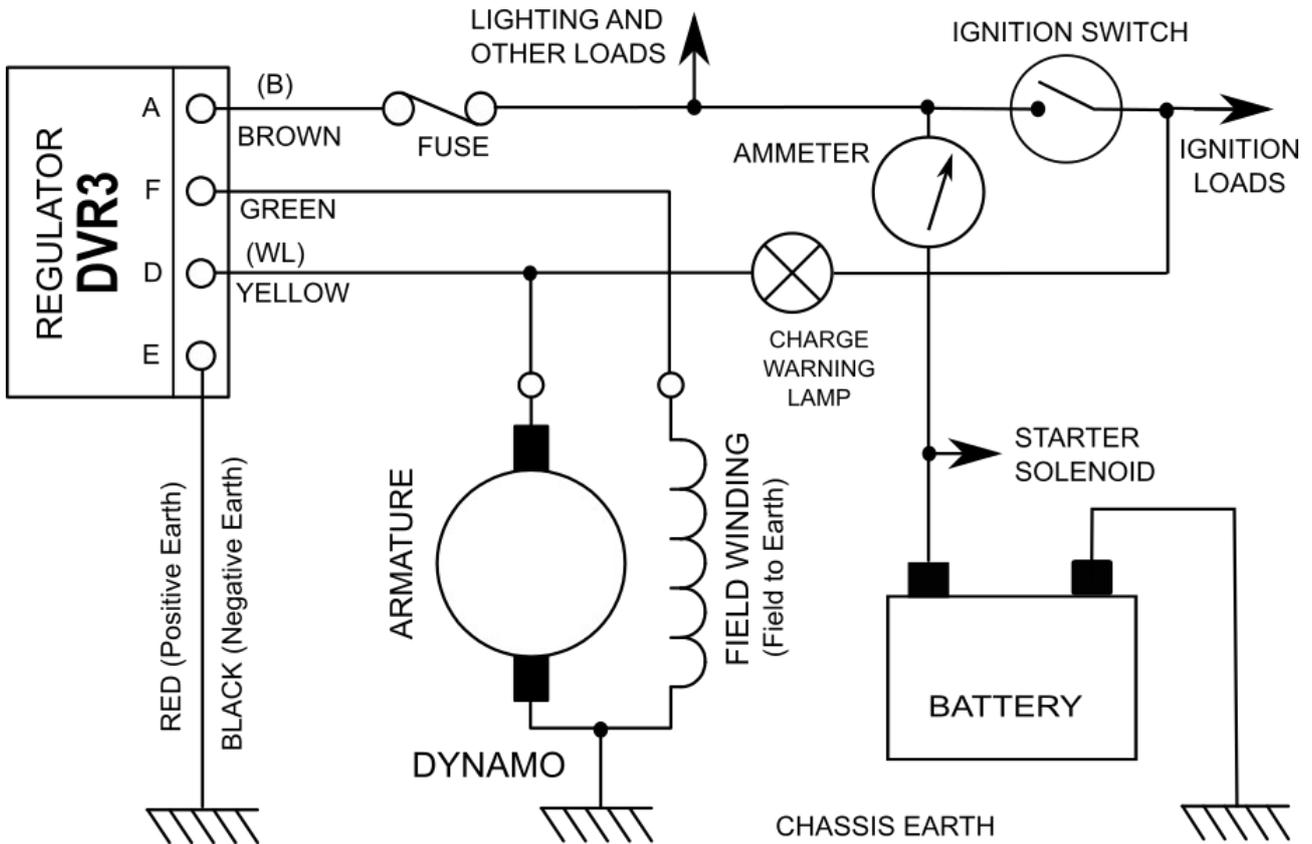

(This partial wiring diagram shows many of the key features you may find on your vehicle. All kinds of variations abound; the aim here is to provide guidance. If uncertain please consult a marque expert.)

Other Notes

Disconnect or remove any field resistor which may be fitted at the dynamo or elsewhere (wire-wound item connected to field terminal). Ensure that the field wire of the dynamo goes to the F terminal of the DVR3, and that no other wire is connected to it. *Failure to do so may result in overcharging and possible damage to equipment.*

The resistance of the dynamo field winding *must* be greater than 2.5 ohms, or the unit may be permanently damaged.

The DVR3 is *not suitable for use with 3 brush* dynamos. In many instances a 3 brush dynamo may be easily converted to a 2 brush unit.

The metal case of the DVR3 is not connected to the 'earth' lead. If the earth connection via the lead is lost the dynamo output voltage will not be regulated.

Guarantee

The DVR3 is guaranteed for one year from purchase against manufacturing defects, but not for faults caused by improper fitting or use.

If in any doubt about fitting consult an experienced auto-electrician or other competent person

Available only from:

ElectroDynamic Solutions Limited	Phone:07789 301013 - UK 9 to 5
PO Box 461, Uckfield	info@electrodynamicsolutions.com
East Sussex TN22 9GF	www.electrodynamicsolutions.com

Please direct all enquiries to ElectroDynamic Solutions



75 Titchfield Park Road, Fareham, Hants PO15 5RN

dynamoregulators.com e-mail: dvr@dynamoregulators.com